


PARISA 70 H:205 CM WITH HINGED DOOR REMOTE



Technical Specifications



PARISA-D Model remote multi-deck chillers provide rich and functional solutions to the users with their modular double-glazed hinged doors. Glass doors and environment friendly equipment save energy and protect your budget. Side panels have injected polyurethane and thickness is 40 mm. Also PARISA-D model has 42 kg/m³ density polyurethane injected body. Also there is undershelf LED option for PARISA-D model which shows inside the chillers brighter.

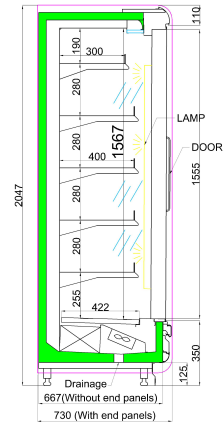

MODEL SIZE (INTERNAL) (MM)	937	1250	1875	2500	2812	3750	
MODEL SIZE (EXTERNAL) (MM)	1017	1330	1955	2580	2892	3830	
COOLING CAPACITY (WATT)	TEMP.CLASS: 3H1/3H2(GROCERY&BOTTLE COOLER)	680	894	1341	1789	2012	2683
	TEMP.CLASS: 3M2 (DIARY)	883	1104	1656	2208	2484	3312
	TEMP.CLASS: 3M1 (MEAT)	942	1177	1766	2354	2648	3531
FRAME & DOORS CONSUMPTION (WATT)	133	146	223	299	310	481	
DOOR NUMBERS (PCS)	2	2	3	4	4	6	
DISPLAY AREA (M ²)	1,43	1,91	2,87	3,83	4,31	5,75	
VOLUME (M ³)	0,79	1,05	1,58	2,11	2,37	3,16	
LIGHTING (WATT)	54	54	72	90	90	126	
TOP LIGHTING (WATT)	9	18	27	36	36	54	
EVAPORATOR FAN NUMBER&WATT	1X38	2X38	3X38	3X38	4X38	5X38	
SHELVES LENGTH (PER LINE) (MM)	1x937	1x1250	2x937	2x1250	3x937	3x1250	
SHELVES DEPTH	1x300mm + 4x400mm						
SHELVES WEIGTH CAPACITY	160 KG / M ²						
BASE WEIGHT CAPACITY	200 KG / M ²						
NO OF ROW (INCLUDING BASE)	6						
AMBIENT CONDITION	@+25°C / 60 % RH						
DIGITAL CONTROLLER	ELIWELL ID SERIES / DIXELL						
SOLENOID VALVE (OPTIONAL)	DANFOSS / OLAB / SANHUA						
EXPANSION VALVE	DANFOSS						

www.coldco.com

