


PARISA 70 H:220 CM WITH HINGED DOOR REMOTE



Technical Specifications



PARISA-D Model remote multi-deck chillers provide rich and functional solutions to the users with their modular double-glazed hinged doors. Glass doors and environment friendly equipment save energy and protect your budget. Side panels have injected polyurethane and thickness is 40 mm. Also PARISA-D model has 42 kg/m³ density polyurethane injected body. Also there is undershelf LED option for PARISA-D model

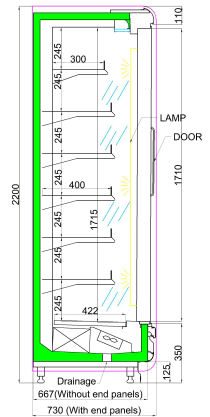

MODEL SIZE (INTERNAL) (MM)	937	1250	1875	2500	2812	3750	
MODEL SIZE (EXTERNAL) (MM)	1017	1330	1955	2580	2892	3830	
COOLING CAPACITY (WATT)	TEMP.CLASS: 3H1/3H2(GROCERY&BOTTLE COOLER)	826	1077	1615	2154	2422	3230
	TEMP.CLASS: 3M2 (DIARY)	1029	1287	1930	2573	2894	3860
	TEMP.CLASS: 3M1 (MEAT)	1088	1360	2039	2719	3059	4079
FRAME & DOORS CONSUMPTION (WATT)	142	156	234	320	329	482	
DOOR NUMBERS (PCS)	2	2	3	4	4	6	
DISPLAY AREA (M ²)	1,57	2,09	3,14	4,19	4,71	6,29	
VOLUME (M ³)	0,86	1,15	1,73	2,30	2,59	3,46	
LIGHTING (WATT)	72	72	96	120	120	168	
TOP LIGHTING (WATT)	9	18	27	36	36	54	
EVAPORATOR FAN NUMBER&WATT	1X38	2X38	3X38	4X38	4X38	6X38	
SHELVES LENGTH (PER LINE) (MM)	1x937	1x1250	2x937	2x1250	3x937	3x1250	
SHELVES DEPTH	1x300mm + 4x400mm						
SHELVES WEIGTH CAPACITY	160 KG / M ²						
BASE WEIGHT CAPACITY	200 KG / M ²						
NO OF ROW (INCLUDING BASE)	6						
AMBIENT CONDITION	@+25°C / 60 % RH						
DIGITAL CONTROLLER	ELIWELL ID SERIES / DIXELL						
SOLENOID VALVE (OPTIONAL)	DANFOSS / OLAB / SANHUA						
EXPANSION VALVE	DANFOSS						

www.coldco.com

