PARISA 70 H:205 CM WITH SLIDING DOOR REMOTE

Technical Specifications

PARISA-SD Model remote multi-deck chillers provide rich and functional solutions to the users with their modular double-glazed sliding doors. Glass doors and environment friendly equipment save energy and protect your budget. Side panels have injected polyurethane and thickness is 40 mm. Also PARISA-SD model has 42 kg/m3 density polyurethane injected body. Also there is undershelf LED option for PARISA-SD model which shows inside the chillers brighter.

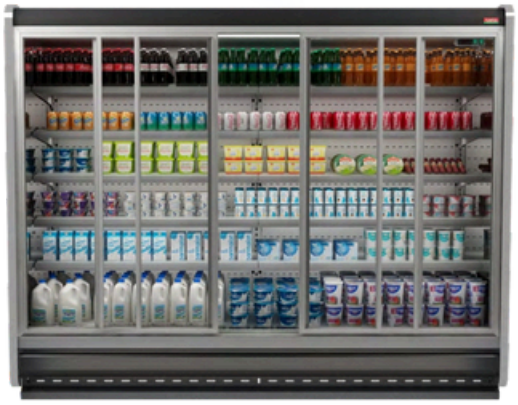

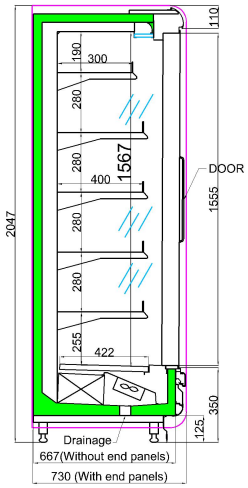

MODEL SIZE (INTERNAL) (MM)		937	1250	1875	2500	2812	3750
MODEL SIZE (EXTERNAL) (MM)		1017	1330	1955	2580	2892	3830
COOLING CAPACITY (WATT)	TEMP.CLASS: 3H1/3H2(GROCERY&BOTTLE COOLER)	931	1225	1838	2450	2756	3675
	TEMP.CLASS: 3M2 (DIARY)	1210	1513	2269	3025	3403	4538
	TEMP.CLASS: 3M1 (MEAT)	1290	1613	2419	3225	3627	4838
DOOR NUMBERS (PCS)		2	2	3	4	4	6
DISPLAY AREA (M²)		1,43	1,91	2,87	3,83	4,31	5,75
VOLUME (M³)		0,79	1,05	1,58	2,11	2,37	3,16
LIGHTING (WATT)		9	18	27	36	36	54
EVAPORATOR FAN NUMBER&WATT		1X38	2X38	3X38	3X38	4X38	5X38
SHELVES LENGTH (PER LINE) (MM)		1x937	1x1250	2x937	2x1250	3x937	3x1250
SHELVES DEPTH		1x300mm + 4x400mm					
SHELVES WEIGTH CAPACITY		160 KG / M²					
BASE WEIGHT CAPACITY		200 KG / M²					
NO OF ROW (INCLUDING BASE)		6					
AMBIENT CONDITION		@+25°C / 60 % RH					
DIGITAL CONTROLLER		ELIWELL ID SERIES / DIXELL					
SOLENOID VALVE (OPTIONAL)		DANFOSS / OLAB / SANHUA					
EXPANSION VALVE		DANFOSS					