


BERFIN H:205 CM REMOTE UPRIGHT DOOR FREEZER



Technical Specifications



BERFIN Model remote multi - deck vertical deepfreezer provide the largest display space and enable the preservation of products for a long time while also saving energy and enabling easy use with their three-fold heated double - glazing doors which prevent clouding. Berfin remote has 42 kg/m³ density polyurethane injection body and side panels. Side panel thickness is 50 mm. Also Berfin remote model has automatic defrost system.

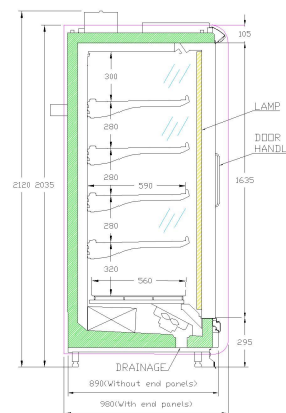

MODEL SIZE (INTERNAL) (MM)		1560	2344	3125	3905
MODEL SIZE (EXTERNAL) (MM)		1660	2444	3225	4005
COOLING CAPACITY (WATT)	TEMP CLASS : 3L2	936	1404	1872	2343
	TEMP CLASS : 3L1	1014	1521	2028	2538
EVAPORATOR HEATER (WATT)		166	183	216	250
TOP HEATER (WATT)		55	75	100	125
FRAME & DOORS CONSUMPTION (WATT)		583	858	1133	1408
DOOR NUMBER (PCS)		2	3	4	5
DISPLAY AREA (M ²)		2,45	3,67	4,90	6,13
VOLUME (M ³)		2,10	3,15	4,20	5,25
SHELVES LENGTH (PER LINE) (MM)		2x770	3x770	4x770	5x770
LIGHTING (WATT)		72	96	120	144
EVAPORATOR FAN NUMBER&WATT		3x43	4x43	5x43	6x43
AMBIENT CONDITION		@+25 °C / 60 % RH			
SHELVES DEPTH		5 x 570 mm			
SHELVES WEIGTH CAPACITY		140 kg / m ²			
NO OF ROW (INCLUDING BASE)		5			
DIGITAL CONTROLLER		ELIWELL ID SERIES / DIXELL			
SOLENOID VALVE (OPTINAL)		DANFOSS / OLAB / SANHUA			

www.coldco.com

